
FW-EWKPM0514-PL-S-0813| 25-02-2025 06-49 | 保留技术性修改

FW-EWKPM0514-PL-S-0813 可现场接线的接插件 – M12电源 母头接插件, M12 × 1, 弯式





型号	FW-EWKPM0514-PL-S-0813
货号	100036618
接插件A	母头接插件, M12 × 1, 弯角, L型
针脚数量	4+FE
触点	铜,CuZn,镀金
触点夹紧	塑料, PA UL94-V0, 灰
拧接把手	塑料, 黑色
连接螺母/螺钉	镀锌膜, GD-Zn, 镀镍
Seal	塑料, FPM/FKM
线缆外径	813 mm
连接方式	螺钉式端子连接
机械寿命	> 100 插接次数
保护类型	IP67, (拧在一起)
电气性能@20°C	
额定电压	50 V _{AC} /63 V _{DC}
电流	12 A
机械和化学性能	
环境温度(固定)	-40+85 °C
认证	通过cULus认证

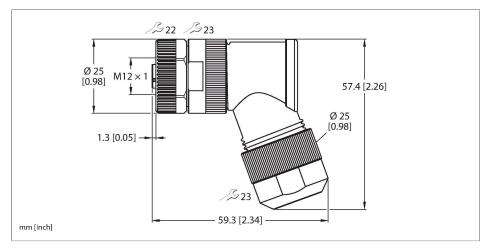

特点









- ■L型
- ■金属连接螺母
- ■螺旋夹端子
- ■5针(4+FE)
- ■线缆引线:8.0...13.0 mm
- ■接线柱可容面积:
- ■最大1.5 mm²或16 AWG(带电缆终端套
- 管) ■最大2.5 mm²或14 AWG(不带电缆终端套 管)

触点分配





下降曲线

