



用于IP-Link的piconet扩展模块 8通道pnp数字量输入，0.2ms滤波 SNNE-0800D-0002

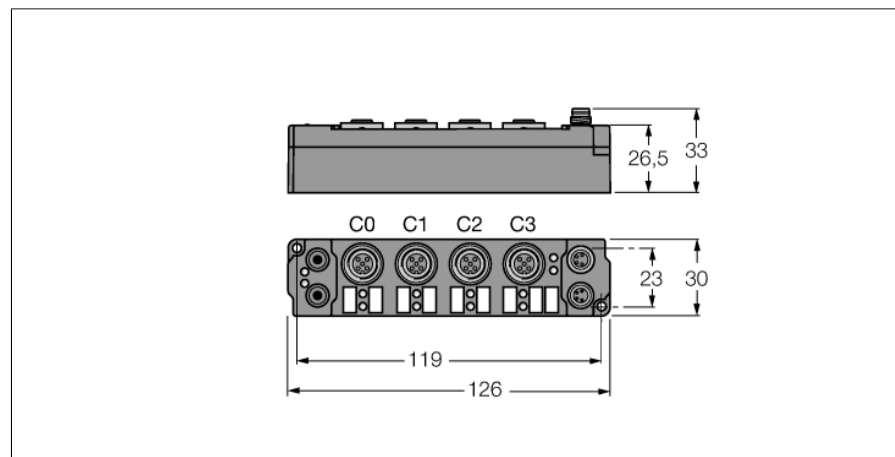


- 直接连接至IP Link
- 玻璃光纤加固外壳
- 模块电路封装
- 金属接插件
- 防护等级IP67

M12 × 1 输入



M8 × 1 电源



$$I_{Bmax} = I_{Lmax} = 4 \text{ A}$$

型号	SNNE-0800D-0002
货号	6824202
通道数	8
工作/负载电压	20...29 VDC
工作电流	≤ 25 mA
Fibre-optic length	≤ 15 m
通道数	8 digital inputs acc. to EN 61131-2
输入电压	20...29 VDC via operating voltage
低电平信号电压	-3...5 VDC (EN 61131-2, type 2)
高电平信号电压	11...30 VDC (EN 61131-2, type 2)
输入延迟	0.2 ms
最大输入电流	6 mA
尺寸 (长/宽/高)	30 x 126 x 26.5 mm
振动测试	符合EN 60068-2-6标准
冲击测试	根据 DIN EN 60068-2-27
电磁兼容性	符合EN 61000-6-2/EN 61000-6-4标准
防护等级	IP67
认证	CE, cULus

过程映像中的数据

			Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Valid, if the coupling module parameter byte alignment is disabled (default) and byte n has been used halfway. Up to 8 bit input data are mapped.	Input	Byte n (M8)	C3P4	C2P4	C1P4	C0P4	is used by the physically preceding bit-oriented extension module connected via the IP Link.			
		Byte n (M12)	C1P2	C1P4	C0P2	C0P4				
		Byte n+1 (M8)	is used by the physically following bit-oriented extension module connected via the IP Link.				C7P4	C6P4	C5P4	C4P4
		Byte n+1 (M12)					C3P2	C3P4	C2P2	C2P4
Valid, if the coupling module parameter byte alignment is active or disabled (default) and the previous byte has been completely used. Up to 8 bit input data are mapped.	Input	Byte n (M8)	C7P4	C6P4	C5P4	C4P4	C3P4	C2P4	C1P4	C0P4
		Byte n (M12)	C3P2	C3P4	C2P2	C2P4	C1P2	C1P4	C0P2	C0P4

C... = Connector no. – P... = Pin no.