


Technical data


Radial shaft load	80 N
Environmental conditions	
Ambient temperature	-40...+85 °C
Vibration resistance (EN 60068-2-6)	30 g (300 m/s ²), 10...2000 Hz
Shock resistance (EN 60068-2-27)	500 g (2500 m/s ²), 4 ms
Protection class	IP65
Protection class shaft	IP65

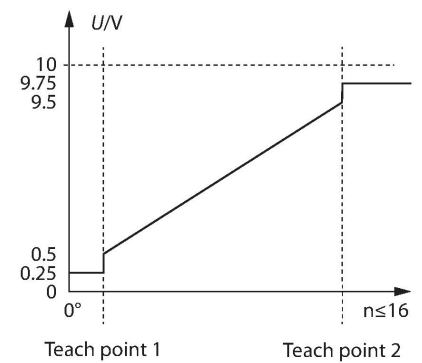

Accessories


RCS-15-08-06	1545361
--------------	---------

Bellows coupling, outer diameter: 15 mm, bore diameter: 8 mm/6 mm




RCS-15-06-06	1545362
--------------	---------

Bellows coupling, outer diameter: 15 mm, bore diameter: 6 mm/6 mm




RA-BC-20-06-06	100048777
----------------	-----------

Bellows coupling with aluminum hub Ø 20 mm; d1 = 6 mm, d2 = 6 mm




RA-BC-20-06-08	100048778
----------------	-----------

Bellows coupling with aluminum hub Ø 20 mm; d1 = 6 mm, d2 = 8 mm




RA-BC-20-06-10	100048779
----------------	-----------

Bellows coupling with aluminum hub Ø 20 mm; d1 = 6 mm, d2 = 10 mm




RA-BC-E-20-06-06	100048785
------------------	-----------

Stainless steel bellows coupling Ø 20 mm; d1 = 6 mm, d2 = 6 mm




RA-BC-E-20-06-10	100048786
------------------	-----------

Stainless steel bellows coupling Ø 20 mm; d1 = 6 mm, d2 = 10 mm




RA-SDC-30-06-10	100048791
-----------------	-----------

Spring disc coupling Ø 30 mm; d1 = 6 mm, d2 = 10 mm



RA-SDC-30-06-06	100048790
-----------------	-----------

Spring disc coupling Ø 30 mm; d1 = 6 mm, d2 = 6 mm



RA-HC-25-06-06	100048794
----------------	-----------

Aluminum helix coupling Ø 25 mm; d1 = 6 mm, d2 = 6 mm

