


# Glass Fiber Bifurcated Fiber BT23S

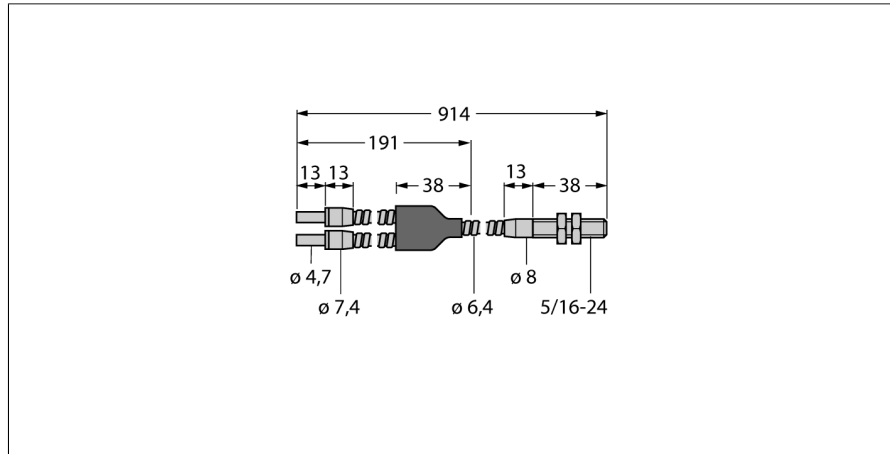

- Operating mode: Diffuse/Retroreflective
- Stainless steel jacket, flexible
- Operating temperature of fiber-optic jacket: -140...+249 °C
- End sleeve for sensor: Brass, thread 5/16"-24
- Operating temperature of fiber-optic tip: -140...+249 °C
- Optical fiber, bundle diameter: 3.2 mm
- Optical fiber, total length: ± 914 mm

### Functional principle

Glass or plastic fibers are the optimum choice for high-temperature applications and limited spaces. They transfer the light from the sensor to a remote object. Individual fibers are used for opposed mode sensing, whereas bifurcated fibers are suited for retroreflective or diffuse mode operation.

Type	BT23S
ID	3017276
<b>Optical data</b>	
Function	Diffuse mode sensor
Fiber-optic type	Glass
<b>Mechanical data</b>	
Design	Circular
Housing material	Stainless steel
Jacket material	Stainless-steel mono-winding coil
Jacket material	metal, 1.4310 (AISI 301)
Bundle diameter	3.2 mm
Material of the fiber-optic tip	Brass
Bending radius	Ø 25 mm
Ambient temperature	-140...+249 °C
Max. temperature tip	249 °C