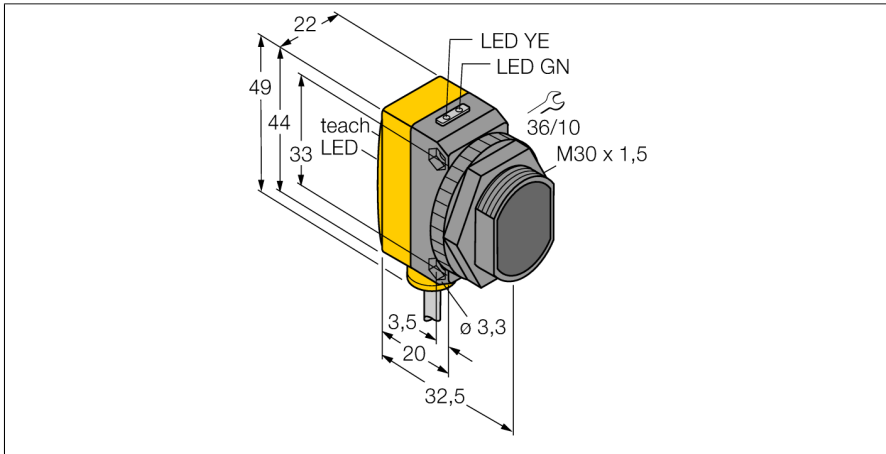


Photoelectric Sensor

Diffuse Mode Sensor with Adjustable Background Suppression


QS30AF W/30



Type	QS30AF W/30
ID	3070290
Optical data	
Function	Proximity switch
Operating mode	Background suppression, adjustable
Light type	Red
Wavelength	660 nm
Range	50...300 mm
Electrical data	
Operating voltage U_s	10...30 VDC
Residual ripple	< 10 % U_s
DC rated operating current I_s	≤ 150 mA
No-load current I_0	≤ 45 mA
Short-circuit protection	yes
Reverse polarity protection	yes
Output function	NO contact, PNP/NPN
Switching frequency	≤ 500 Hz
Readiness delay	≤ 250 ms
Response time typical	< 1 ms
Setting option	Push Button Remote Teach
Mechanical data	
Design	Rectangular with thread, QS30
Dimensions	Ø 30 x 35 x 22 x 49 mm
Housing material	Plastic, Thermoplastic material, Yellow
Lens	plastic, Acrylic
Electrical connection	Cable, 9 m, PVC
Number of cores	5
Core cross-section	0.5 mm ²
Ambient temperature	-10...+55 °C
Protection class	IP67

- Cable, PVC, 9 m
- Protection class IP67
- LED, all-round visible
- Cut-off point adjusted via teach button
- Operating voltage: 10...30 VDC
- Switching output, bipolar
- Light or dark operation

Wiring Diagram




Functional principle

Diffuse mode sensors with background suppression operate with a single emitter and several receiver elements. The target's position and the optical structure of the sensor determine which receiver element gets the most light. The sensor electronics then determines whether the reflecting target is in or outside the measuring range. The sensors are available with adjustable or fixed cut-off point.






Excess gain curve

Excess gain in relation to distance

Special features	keep/defer
Power-on indication	LED, Green
Switching state	LED, Yellow
Error indication	LED, green, Flashing
Excess gain indication	Bargraph, red, flashing
Tests/approvals	
Approvals	CE

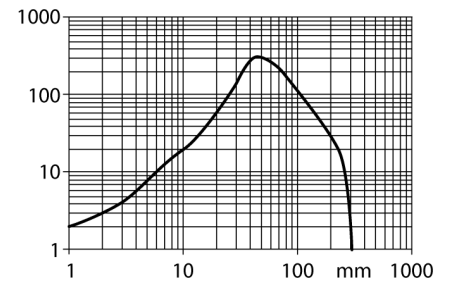

Accessories

Type code	Ident no.		Dimension drawing
SMBQS30Y	3002811	Protective housing, stainless steel, for QS30 series	
SMBQS30YL	3072741	Protective housing with safety glass panel, stainless steel, for QS30 series	
SMB30A	3032723	Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread	
SMBQS30L	3002809	Mounting bracket, stainless steel, for QS30 series	
SMB30MM	3027162	Mounting bracket, rectangular, stainless steel, for sensors with 30 mm thread, wide holes for accurate alignment	

Accessories

Type code	Ident no.		Dimension drawing
SMB30SC	3052521	Mounting bracket, PBT black, for sensors with 30 mm thread, rotatable	