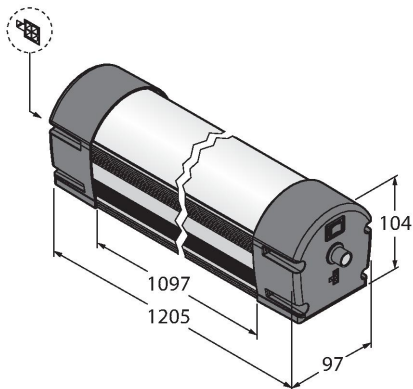


WLB92ZCWW1100PBQM

LED Linear Light – In the Metal Housing



Technical data

Type	WLB92ZCWW1100PBQM
ID	3800730
Signal and display data	
Purpose	LED work light
Function	Linear light
Light type	Warm white
Luminous flux lumen	5645 lm
Dimmable	Potentiometer
Electrical data	
Operating voltage U _B	100...277 VAC
Mechanical data	
Design	Rectangular, WLB92
Dimensions	1220 x 97 x 104 mm
Housing material	Anodized aluminium, AL, Anodized
Window material	Epoxy resin, diffuse
Electrical connection	Cable with connector
Ambient temperature	-40...+70 °C
Protection class	IP40
Tests/approvals	
Approvals	CE






Features

- Light length: 1100 mm
- Operating voltage: 100...277 VAC
- Protection class: IP50
- Color: warm white
- M12 x 1 male
- Built-in ON/OFF switch
- Integrated rotary switch for continuous dimming of the light output (0% - 100%)



Functional principle

The WLB92 LED linear light is designed for multi-purpose use, is powered by 24 VDC and convinces by its robust metal housing and shatter-proof window material. With the built-in toggle switch, the light can be switched on or off and also fully dimmed, 0%-100%, by the rotary switch. The color temperature lies in the range of daylight, between 5,000 and 10,000 Kelvin. With a lifetime of 50,000 hours and very energy efficient LEDs, this a cost-saving and environmentally friendly alternative to conventional fluorescent lamps. This linear light is available in two lengths and more than twice as bright as the known WLB32 LED light.

Accessories

LMBWLB92	3093567	Snap bracket for WLB92 work light, included in the WLB92 scope of delivery	LMBWLB92CLIP	3093568	Snap bracket for WLB92 linear light
					
LMBWLB92HK5	3093569	Pendant mounting bracket for WLB92	LMBWLB92S	3093570	Mounting bracket for front side mounting of the WLB92
					
LMBWLB92RAS	3093571	Pivoting mounting bracket for WLB92 line light			
					

Accessories

Dimension drawing	Type	ID	
	LQMAC-306	3086779	Connection cable, 3-wire, stranded wire
	LQMAEC-306SS	3085580	Extension cable to cascade WLB32 lights, length 1.83 m, optional