


# NI5-M08-VN6X 7M


## Inductive Sensor – With Increased Switching Distance



### Features

- Threaded barrel, M8 x 1
- Nickel-plated brass
- Large sensing range
- DC 4-wire, 10...30 VDC
- Complementary, NPN output
- Cable connection

### Wiring diagram



### Functional principle

Inductive sensors detect metal objects contactless and wear-free. For this, they use a high-frequency electromagnetic AC field that interacts with the target. Inductive sensors generate this field via an RLC circuit with a ferrite coil.


### Technical data

|                                        |                                                     |
|----------------------------------------|-----------------------------------------------------|
| Type                                   | NI5-M08-VN6X 7M                                     |
| ID                                     | 4603038                                             |
| <b>General data</b>                    |                                                     |
| Rated switching distance               | 5 mm                                                |
| Mounting conditions                    | Non-flush                                           |
| Secured operating distance             | $\leq (0.81 \times S_n)$ mm                         |
| Correction factors                     | St37 = 1; Al = 0.3; stainless steel = 0.7; Ms = 0.4 |
| Repeat accuracy                        | $\leq 2$ % of full scale                            |
| Temperature drift                      | $\leq \pm 10$ %                                     |
| Hysteresis                             | 3...15 %                                            |
| <b>Electrical data</b>                 |                                                     |
| Operating voltage $U_B$                | 10...30 VDC                                         |
| Ripple $U_{ss}$                        | $\leq 10$ % $U_{Bmax}$                              |
| DC rated operating current $I_o$       | $\leq 150$ mA                                       |
| No-load current                        | $\leq 15$ mA                                        |
| Residual current                       | $\leq 0.1$ mA                                       |
| Isolation test voltage                 | 0.5 kV                                              |
| Short-circuit protection               | yes/Cyclic                                          |
| Voltage drop at $I_o$                  | $\leq 1.8$ V                                        |
| Wire break/reverse polarity protection | yes/Complete                                        |
| Output function                        | 4-wire, Complementary contact, NPN                  |
| Switching frequency                    | 2.8 kHz                                             |
| <b>Mechanical data</b>                 |                                                     |
| Design                                 | Threaded barrel, M8 x 1                             |
| Dimensions                             | 32.1 mm                                             |
| Housing material                       | Metal, CuZn, Nickel Plated                          |

Technical data

|                                       |                                            |
|---------------------------------------|--------------------------------------------|
| Active area material                  | Plastic, PP-GF20                           |
| End cap                               | Plastic, PP-GF20                           |
| Max. tightening torque of housing nut | 7 Nm                                       |
| Electrical connection                 | Cable                                      |
| Cable quality                         | Ø 3 mm, Gray, Lif9Y-11Y, PUR, 7 m          |
| Core cross-section                    | 4 x 0.14 mm <sup>2</sup>                   |
| Environmental conditions              |                                            |
| Ambient temperature                   | -25...+70 °C                               |
| Vibration resistance                  | 55 Hz (1 mm)                               |
| Shock resistance                      | 30 g (11 ms)                               |
| Protection class                      | IP67                                       |
| MTTF                                  | 2283 years acc. to SN 29500 (Ed. 99) 40 °C |
| Switching state                       | LED, Yellow                                |

Mounting instructions

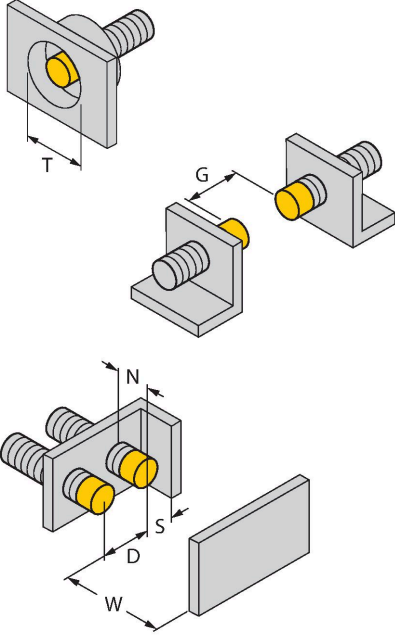
| Mounting instructions/Description                                                   |                        |         |
|-------------------------------------------------------------------------------------|------------------------|---------|
|  | Distance D             | 3 x B   |
|                                                                                     | Distance W             | 3 x Sn  |
|                                                                                     | Distance T             | 3 x B   |
|                                                                                     | Distance S             | 1.5 x B |
|                                                                                     | Distance G             | 6 x Sn  |
|                                                                                     | Distance N             | 2 x Sn  |
|                                                                                     | Diameter active area B | Ø 8 mm  |
|                                                                                     |                        |         |

## Accessories

MW08

6945008


Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304)



BSS-08

6901322

Mounting clamp for smooth and threaded barrel sensors; material: Polypropylene



MBS80

69479

Mounting clamp for smooth barrel sensors; mounting block material: Anodized aluminum

