

# RKS4.5T-40/TXL

## Actuator and Sensor Cable, PUR – Connection Cable



### Technical data


|                                        |                                        |
|----------------------------------------|----------------------------------------|
| Type                                   | RKS4.5T-40/TXL                         |
| ID                                     | 6627634                                |
| Connector A                            | Female, M12 × 1, Straight, A-coded     |
| Number of pins                         | 5                                      |
| Contacts                               | Brass, CuZn, Gold-plated               |
| Contact carriers                       | Plastic, TPU, Black                    |
| Connector body                         | Plastic, TPU, Black                    |
| Coupling nut/screw                     | Brass, CuZn, Nickel-plated             |
| Seal                                   | Plastic, FPM/FKM                       |
| Mechanical lifespan                    | > 100 Mating cycles                    |
| Pollution degree                       | 3                                      |
| Protection class                       | IP67, IP69K, Only in screwed condition |
| <b>Cable</b>                           |                                        |
| Cable diameter                         | Ø 5.7 mm ±0.20                         |
| Cable length                           | 40 m                                   |
| Cable jacket                           | PUR, Black                             |
| Shielding                              | Aluminum foil, tinned copper wire      |
| Core insulation                        | PP                                     |
| Core cross-section                     | 5 x 0.34 mm <sup>2</sup>               |
| Arrangement of strands                 | 42 x 0.1 mm                            |
| Core colors                            | BN, WH, BU, BK, GY                     |
| <b>Electrical properties at +20 °C</b> |                                        |
| Rated voltage                          | 60 V                                   |
| Test voltage                           | 2000 V                                 |
| Current                                | 4 A                                    |
| Insulation resistance                  | > 30.5 MΩ/km                           |
| forward resistance                     | max. 57 Ω/km                           |

### Features



- Female M12, straight, 5-pin
- Shield on coupling nut/screw
- Jacket material: PUR, shielded
- Jacket color: black
- Suitable for drag chain use
- Resistant to chemicals, UV radiation and oils
- Flame retardant (FT2 acc. to UL 1581, IEC 60332-2-2)
- Resistant to welding sparks
- Free from halogen, silicone, PVC and LABS
- Particularly resistant to abrasion
- Protection class: IP67, IP69K
- Cable length: 40 m

### Cable Cross-Section

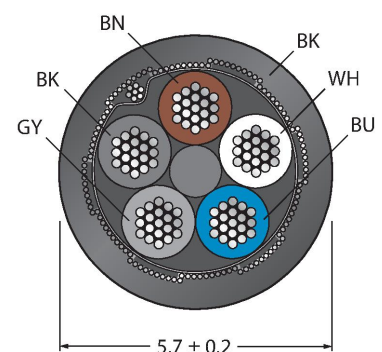

### Contact assignment

