
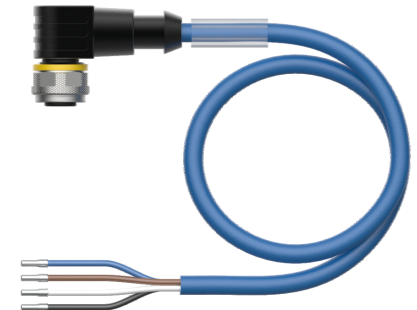


# WKC4.441T-2/TEB

## Actuator and Sensor Cable, PVC – Connection Cable

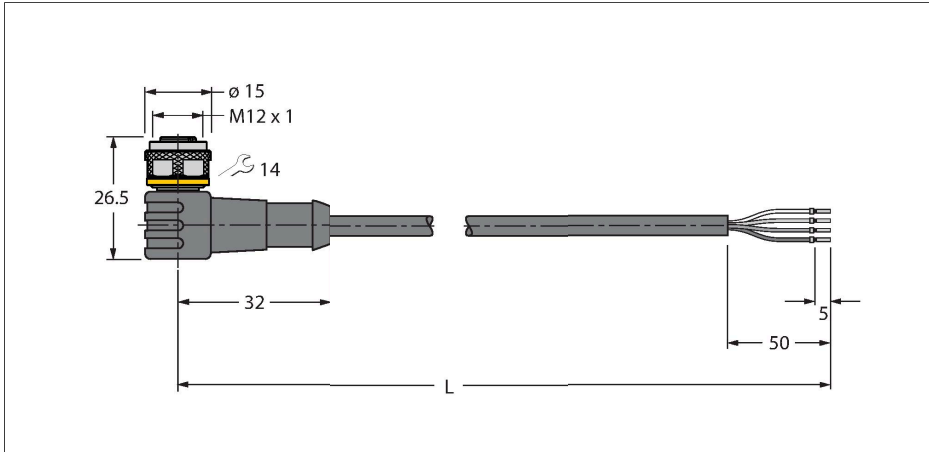

### Technical data


|                                 |  |
|---------------------------------|--|
| Type                            | WKC4.441T-2/TEB                        |
| ID                              | 6628451                                |
| Connector A                     | Female, M12 × 1, Angled, A-coded       |
| Number of pins                  | 4                                      |
| Contacts                        | Brass, CuZn, Gold-plated               |
| Contact carriers                | Plastic, TPU, Black                    |
| Connector body                  | Plastic, TPU, Black                    |
| Coupling nut/screw              | Brass, CuZn, Nickel-plated             |
| Seal                            | Plastic, FPM/FKM                       |
| Mechanical lifespan             | > 100 Mating cycles                    |
| Pollution degree                | 3                                      |
| Protection class                | IP67, IP69K, Only in screwed condition |
| Cable                           |  |
| Cable diameter                  | Ø 4.6 mm ±0.20                         |
| Cable length                    | 2 m                                    |
| Cable jacket                    | PVC, Blue                              |
| Core insulation                 | PVC                                    |
| Core cross-section              | 4 x 0.34 mm <sup>2</sup>               |
| Arrangement of strands          | 42 x 0.1 mm                            |
| Core colors                     | BN, WH, BU, BK                         |
| Electrical properties at +20 °C |  |
| Rated voltage                   | 250 V                                  |
| Test voltage                    | 2000 V                                 |
| Current                         | 4 A                                    |
| Insulation resistance           | > 30.5 MΩ/km                           |
| forward resistance              | max. 57 Ω/km                           |
| Nom. capacitance                | 0.49 pF/m                              |

### Features




- Female M12, angled, 4-pin
- Jacket material: PVC
- Jacket color: blue
- Flame retardant
- Resistant to chemicals and oils
- Resistant to microbes and hydrolysis
- LABS free
- Protection class: IP67, IP69K
- Cable length: 2.0 m

### Cable Cross-Section

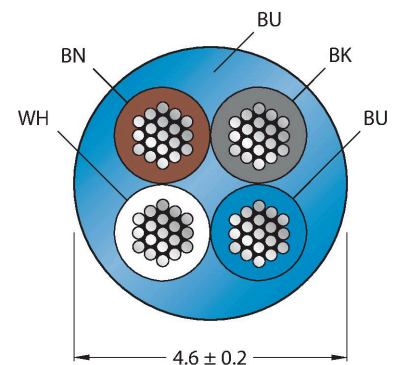


### Contact assignment



## Technical data


|   |                              |
|---|------------------------------|
| Nom. Inductance                           | 1.08 mH/km                   |
| <b>Mechanical and chemical properties</b> |                              |
| Bending radius (stationary installation)  | $\geq 5 \times \varnothing$  |
| Bending radius (flexible use)             | $\geq 10 \times \varnothing$ |
| Ambient temperature (fixed)               | -40...+105 °C                |
| Ambient temperature (mobile)              | -5...+80 °C                  |
| Approvals                                 | cULus                        |

## Circuit Diagram




## Accessories

HAS8141-0 6905406




Field-wireable male connector, M12 × 1, straight, 4-pin, insulation piercing connection, cable feedthrough 4.0 to 5.1 mm, core cross-section/terminal capacity 0.14 to 0.34 mm<sup>2</sup>, plastic housing, metal nut

HAS8241-0 6905400




Field-wireable male connector, M12 × 1, angled, 4-pin, insulation piercing connection, cable feedthrough 4.0 to 5.1 mm, core cross-section/terminal capacity 0.14 to 0.34 mm<sup>2</sup>, plastic housing, metal nut

BS8141-0 69010




Field-wireable male connector, M12 × 1, straight, 4-pin, screw terminal connection, cable feedthrough 4.0 to 6.0 mm, core cross-section/terminal capacity 0.14 to 0.75 mm<sup>2</sup>, plastic housing, metal retaining screw

BS8241-0 69011




Field-wireable connector, M12 × 1, angled, 4-pin, screw terminal connection, cable feedthrough 4.0 to 6.0 mm, core cross-section/terminal capacity 0.14 to 0.75 mm<sup>2</sup>, plastic housing, metal retaining screw

FW-ERSPM0426-SA-P-0408 100002048




Field-wireable male connector, M12 × 1, straight, 4-pin, push-in connection, cable feedthrough 4.0 to 8.0 mm, core cross-section/terminal capacity 0.14 to 0.75 mm<sup>2</sup>, plastic housing, metal retaining screw

FW-ERSPM0416-SA-S-0408 100002288



Field-wireable male connector, M12 × 1, straight, 4-pin, screw terminal connection, cable feedthrough 4.0 to 8.0 mm, core cross-section/terminal capacity 0.25 to 1.5 mm<sup>2</sup>, plastic housing, metal retaining screw

FW-EWSPM0416-SA-S-0408 100002290




Field-wireable male connector, M12 × 1, angled, 4-pin, screw terminal connection, cable feedthrough 4.0 to 8.0 mm, core cross-section/terminal capacity 0.25 to 1.5 mm<sup>2</sup>, plastic housing, metal retaining screw

TORQUE-WRENCH-SET-AS 6936170


Torque wrench set; handles with adjustable torque 0.4-1.0 Nm, torque wrench for M8 (SW9), fork wrench for M12 (SW 14)

**BLANK-LABEL-FOR-CORDSETS-TEL-TXL      6936206**

Label for TEL and TXL cables, length: 18 mm, height: 4 mm, material: polycarbonate (PC), color: white, halogen-free and flame-retardant



## Accessories

| Dimension drawing   | Type                  | ID        |  |
|---|-----------------------|-----------|--|
|  | LABEL-HOLDER-FLEX-PVC | 100048170 | PVC label holder for identification of extension cables (TEL/TXL product series); for cable diameters: min. 5 mm; dimensions 4 × 18 mm; delivery unit: 50 pcs. per package |