
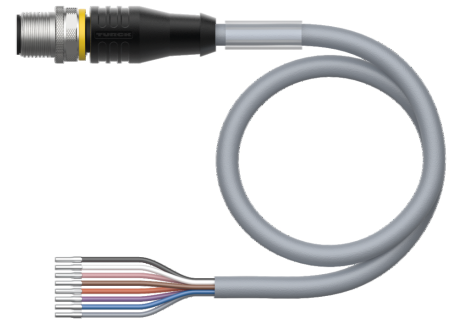


# RSS8T-5/TXG

## Actuator and Sensor Cable, PUR – Connection Cable

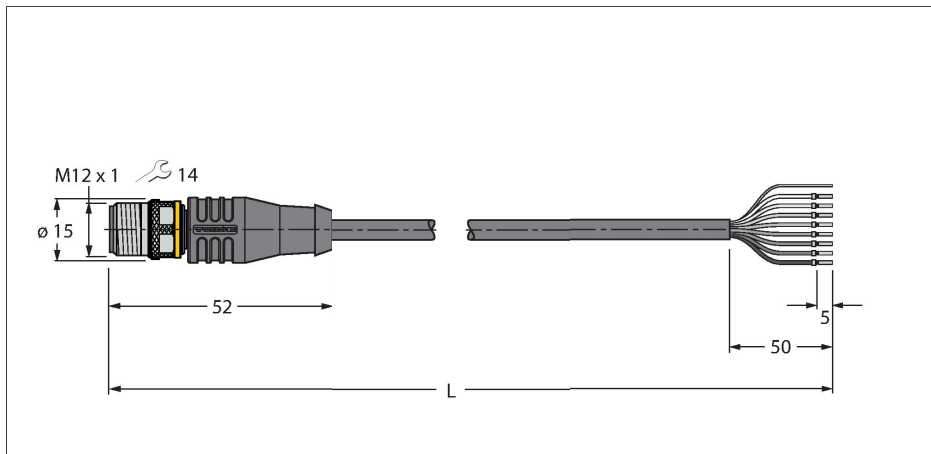

### Technical data


|                                        |                                        |
|----------------------------------------|----------------------------------------|
| Type                                   | RSS8T-5/TXG                            |
| ID                                     | 6630685                                |
| Connector A                            | Male, M12 × 1, Straight, A-coded       |
| Number of pins                         | 8                                      |
| Contacts                               | Brass, CuZn, Gold-plated               |
| Contact carriers                       | Plastic, TPU, Black                    |
| Connector body                         | Plastic, TPU, Black                    |
| Coupling nut/screw                     | Brass, CuZn, Nickel-plated             |
| Mechanical lifespan                    | > 100 Mating cycles                    |
| Pollution degree                       | 3                                      |
| Protection class                       | IP67, IP69K, Only in screwed condition |
| <b>Cable</b>                           |                                        |
| Cable diameter                         | Ø 6.3 mm ±0.20                         |
| Cable length                           | 5 m                                    |
| Cable jacket                           | PUR, Gray                              |
| Shielding                              | Aluminum foil, tinned copper wire      |
| Core insulation                        | PP                                     |
| Core cross-section                     | 8 x 0.25 mm²                           |
| Arrangement of strands                 | 32 x 0.1 mm                            |
| Core colors                            | BN, WH, BU, BK, GY, PK, VT, OG         |
| <b>Electrical properties at +20 °C</b> |                                        |
| Rated voltage                          | 30 V                                   |
| Test voltage                           | 2000 V                                 |
| Current                                | 2 A                                    |
| Insulation resistance                  | > 30.5 MΩ/km                           |
| forward resistance                     | max. 79 Ω/km                           |

### Features



- Male M12, straight, 8-pin
- Shield on coupling nut/screw
- Jacket material: PUR, shielded
- Jacket color: gray
- Suitable for drag chain use
- Resistant to chemicals, UV radiation and oils
- Flame retardant (FT2 acc. to UL 1581, IEC 60332-2-2)
- Free from halogen, silicone, PVC and LABS
- Particularly resistant to abrasion
- Protection class: IP67, IP69K
- Cable length: 5.0 m


### Cable Cross-Section

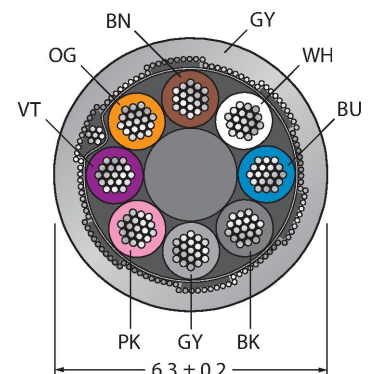

### Contact assignment

Technical data


| Mechanical and chemical properties       |                 |
|------------------------------------------|-----------------|
| Bending radius (stationary installation) | ≥ 5 x Ø         |
| Bending radius (flexible use)            | ≥ 10 x Ø        |
| Bending cycles                           | ≥ 2 million     |
| Admissible acceleration                  | max. 5 m/s²     |
| Admissible travel path, horizontal       | 5 m (at 5 m/s²) |
| Admissible travel path, vertical         | 2 m (at 5 m/s²) |
| Admissible traversing speed              | 3.3 m/s         |
| Torsional stress                         | ± 180 °/m       |
| Ambient temperature (fixed)              | -50...+80 °C    |
| Ambient temperature (mobile)             | -25...+80 °C    |
| Ambient temperature (drag chain)         | -25...+60 °C    |
| Approvals                                | cULus           |



Functional principle

Drawing shows design status including hexagon coupling nut (Production start CW11/2016). Wiring diagram shows contact assignment acc. to DIN EN 60947-5-2 (Production start CW16/2017).

Circuit Diagram




Stranded Wire Colors

| Pin | DIN 47100 (old) | DIN EN 60947-5-2 (new) |
|-----|-----------------|------------------------|
| 1   | WH              | BN                     |
| 2   | BN              | WH                     |
| 3   | GN              | BU                     |
| 4   | YE              | BK                     |
| 5   | GY              | GY                     |
| 6   | PK              | PK                     |
| 7   | BU              | VT                     |
| 8   | RD              | OG                     |


Accessories

|           |         |
|-----------|---------|
| CMB8181-0 | 6931450 |
|-----------|---------|



Field-wireable female connector, M12 × 1, straight, 8-pin, screw terminal connection, cable feedthrough 6.0 to 8.0 mm, core cross-section/terminal capacity 0.14 to 0.50 mm², metal housing, metal nut, shieldable

|           |         |
|-----------|---------|
| CMB8281-0 | 6932024 |
|-----------|---------|



Field-wireable female connector, M12 × 1, angled, 8-pin, screw terminal connection, cable feedthrough 6.0 to 8.0 mm, core cross-section/terminal capacity 0.14 to 0.50 mm², metal housing, metal nut, shieldable

|                                                                                                                       |         |
|-----------------------------------------------------------------------------------------------------------------------|---------|
| TORQUE-WRENCH-SET-AS                                                                                                  | 6936170 |
| Torque wrench set; handles with adjustable torque 0.4-1.0 Nm, torque wrench for M8 (SW9), fork wrench for M12 (SW 14) |         |

|                                                                                                                                         |         |
|-----------------------------------------------------------------------------------------------------------------------------------------|---------|
| BLANK-LABEL-FOR-CORDSETS-TEL-TXL                                                                                                        | 6936206 |
| Label for TEL and TXL cables, length: 18 mm, height: 4 mm, material: polycarbonate (PC), color: white, halogen-free and flame-retardant |         |



Accessories

| Dimension drawing                                                                 | Type                  | ID        |                                                                                                                                                                            |
|-----------------------------------------------------------------------------------|-----------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | LABEL-HOLDER-FLEX-PVC | 100048170 | PVC label holder for identification of extension cables (TEL/TXL product series); for cable diameters: min. 5 mm; dimensions 4 × 18 mm; delivery unit: 50 pcs. per package |