


LED-signaallamp

Signaallamp

K50BCLYWXPQ



Type	K50BCLYWXPQ
Identnr.	3800152

Signaal- en weergavegegevens	
Toepassingsdoel	LED-lamp
Functie	Spot-licht
Lichtsoort	geel wit
LED-levensduur (L70)	50000 h
Dimbaar	Nee
Kenmerken kleur 1	Geel, Doorlopend aan
Kenmerken kleur 2	Wit
Bijzondere kenmerken	Wash down


Elektrische gegevens	
Bedrijfsspanning U_s	12...30 VDC
DC nominale bedrijfsstroom I_s	≤ 160 mA
Max. stroomverbruik per kleur	95 mA
Ingangstype	PNP
Aanspreektijd typisch	< 7 ms

Mechanische gegevens	
In cascade monteerbaar	Nee
Bouwworm	Puck, K50BL
Afmetingen	$\varnothing 50 \times 60$ mm
Materiaal behuizing	Kunststof, PC, zwart
Window material	Polycarbonaat, helder
Elektrische aansluiting	Connector, M12 $\times$ 1, PVC
Aantal aders	4
Omgevingstemperatuur	-40...+50 °C
Relatieve luchtvochtigheid	0...90%
Beschermingsgraad	IP67 IP69

Tests/certificaten	
Certificaten	CE, cULus gelisted

- rondom zichtbare LED-lamp
- boven- en zijaanzicht
- apart aanstuurbaar
- mechanische schroefdraad M30x1.5
- beschermingsgraad IP67
- Kleuren: geel (COL 1) / wit (COL 2)
- connector M12x1
- bedrijfsspanning 12...30 VDC

Aansluitschema

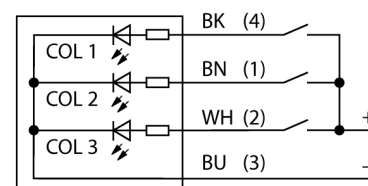

Toebehoren

Type	Ident no.		Afmetingen
SMB30A	3032723	montagebeugel, haaks, roestvast staal, voor sensoren met 30mm schroefdraad	 Technical drawing of the SMB30A mounting bracket. It is an L-shaped bracket made of stainless steel. Dimensions include: top horizontal arm width 45mm, vertical arm height 38.5mm, mounting hole diameter $\varnothing 30.5$, bracket thickness 6.3mm, bottom horizontal arm width 69mm, and a 7.5mm gap from the bottom edge to the mounting hole. A 61mm dimension is also shown for the vertical arm's mounting section.
SMB30SC	3052521	montagebeugel, PBT-zwart, voor sensoren met 30 mm schroefdraad, oriënteerbaar	 Technical drawing of the SMB30SC mounting bracket. It is a rectangular bracket made of black PBT. Dimensions include: top width 66.5mm, mounting hole diameter $\varnothing 30$, hole depth 1.5mm, bracket thickness 7mm, bottom width 50.8mm, and a 29mm dimension for the bottom flange. A 58.7mm dimension is shown for the mounting section.