


Plastic Fiber
Single Conductor — Jacketed Optical Cable Made of Plastic
Fiber
PIT46UC

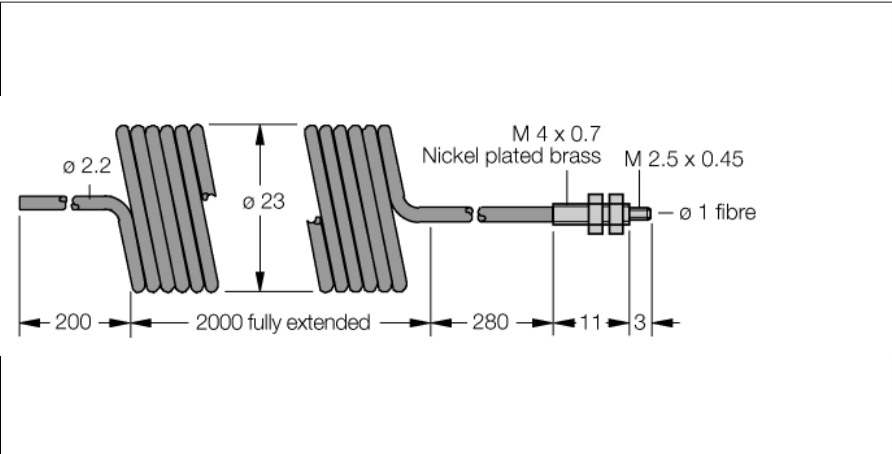

- Operation: opposed mode
- 2 pcs. included in delivery
- Polyethylene sheath, flexible
- Operating temperature: -30...+70 °C
- Coiled, customizable cable
- Threaded end tip M2.5 × 0.45
- Coiled cable
- Optical fiber, core diameter 1.0 mm
- Optical fiber, total length: ± 1829 mm

Functional principle

Glass or plastic fibers are the optimum choice for high-temperature applications and limited spaces. They transfer the light from the sensor to a remote object. Individual fibers are used for opposed mode sensing, whereas bifurcated fibers are suited for retroreflective or diffuse mode operation.

Type	PIT46UC
ID	3026085
Optical data	
Function	Opposed mode sensor (emitter/receiver)
Fiber-optic type	Plastic
Mechanical data	
Design	Circular
Housing material	Plastic, PE, Black
Jacket material	Polyethylene
Jacket material	plastic, PE
Bundle diameter	1 mm
Material of the fiber-optic tip	Nickel-Plated Brass
Bending cycles	5000
Bending radius	Ø 25 mm
Ambient temperature	-30...+70 °C
Max. temperature tip	70 °C
Special features	Movable back and forth